

AKUSTIK® - BAND

MATERIAL

AKUSTIK®-BAND is the gasket resistant to noises, air, water and dust. This product made of expanded reticulated polyethylene with closed cells, density 33 Kg/m³, can be supplied single/double-sided self-adhesive. On request it is possible to package every single roll with a plastic film.


FIELDS OF APPLICATION

AKUSTIK®-BAND is widely used as gaskets for metal structures for plasterboards and moveable walls, as well as for channellings, ventilation plant and plant engineering.

INSTALLATION

AKUSTIK®-BAND is easy to install thanks to its self-adhesive side and it can be applied to any surface provided that it is smooth and free of oil, dust and grease.

INSULATING TAPED MADE OF EXPANDED CROSS-LINKED POLYETHYLENE WITH CLOSED-CELL STRUCTURE

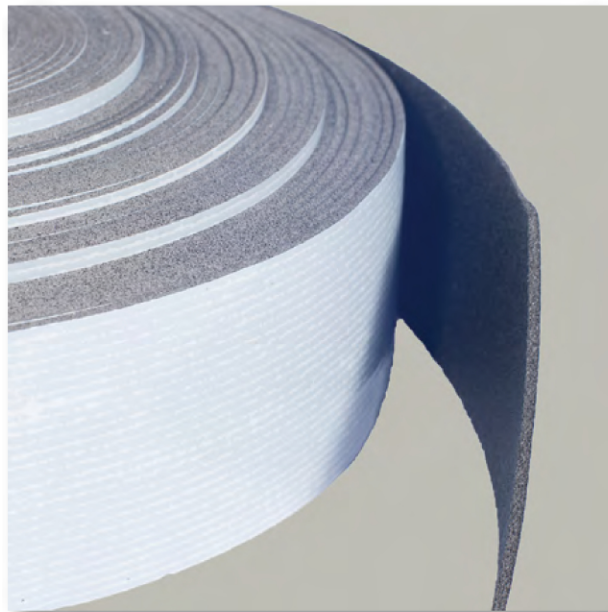

STANDARD DIMENSIONS

Thickness: 3, 5, 10 mm

Width: 20, 30, 40, 50, 70, 90 mm, etc.

Length: mtl 20 (3 mm thick), mtl 20 (5 mm thick), mtl 10 (10 mm thick).

TECHNICAL CHARACTERISTICS

- **Adhesive:** Acrylic water-based
- **Color:** dark grey
- **Reaction to fire:** F, B-s1, d0 on request
- **Thermal conductivity:** $\lambda = 0,035 \text{ WmK}$
- **Density:** 33 Kg/m³
- **Thermal resistance:** -80 + 100 °C