


PB - BAND

PB-BAND IS THE 99,99% PURE LEAD BAND

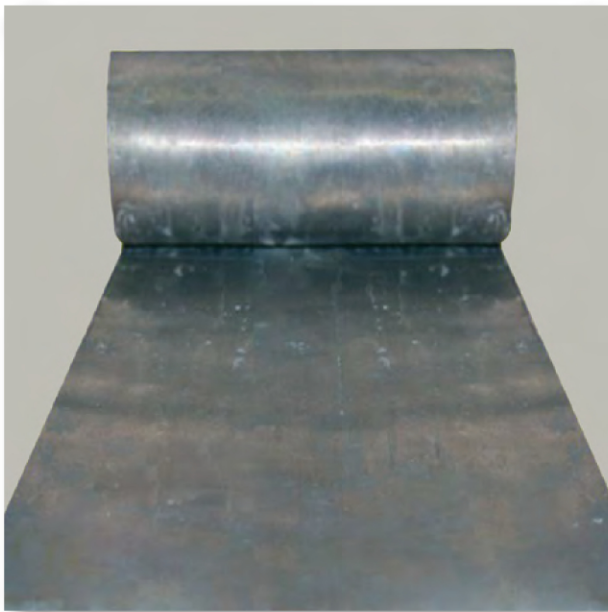

STANDARD DIMENSIONS

Product in Rolls

Width: on request (10, 15, 20, 30 cm, etc)

Thickness: 0,35 - 0,50 - 1 - 2 - 3 - 4 mm

Dimensions tolerance: to DIN 7715 Part 2.

MATERIAL

99,99% 1st choice pure lead band, to seal junctions between lead-combined plasterboards (Akustik® Gips Art. 4). Available in different thicknesses (0,35 – 0,50 – 1 - 2 – 3 - 4 mm) and variable width in order to obtain a perfect installation for soundproofing and radiation insulation.

FIELDS OF APPLICATION

Pb-Band seals junctions between lead-combined plasterboards (Akustik® Gips Art. 4). It is used especially for radiation insulating installations and thanks to its elevated mass, it is also an excellent soundproofing product.

INSTALLATION

Pb-Band must be placed using NDA KOLL glue. On request it can be also supplied with a selfadhesive side.