


AKUSTIK® - BORDER

AKUSTIK®-BORDER IS THE 'L-SHAPED' BAND FOR THE PERIMETRICAL WALLS, WITH AN EASY AND FAST APPLICATION

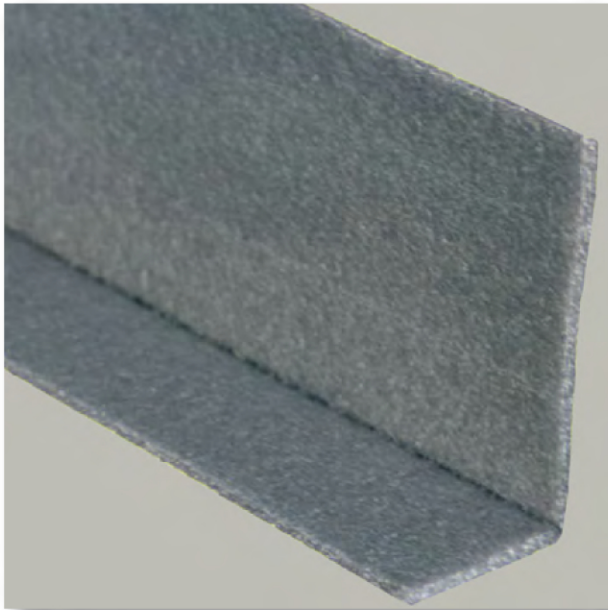

STANDARD DIMENSIONS

Width: 100+50 mm - 150+50 mm

Length: 50 mtl

Thickness: 6 mm

TECHNICAL CHARACTERISTICS

- **Material:** expanded polyethylene

MATERIAL

L'Akustik®-Border is made of an expanded polyethylene with a cell-closed structure and a "L" shape. It must be placed between the perimetral wall and the floor to avoid their contact.

FIELDS OF APPLICATION

Akustik®-Border can be used in all the footfall soundproofing insulation systems, as an essential adjunct to realize a perfect footfall soundproofing.

INSTALLATION

Akustik®-Border has a self-adhesive side and it is very easy to be installed.

This material must be placed between the wall and the floor and cut after the flooring.

Akustik®-Border avoids the difficult and unclear lapel of the insulating material on the perimeter walls. The part that is overlapped must be cut after floor laying and grouting