
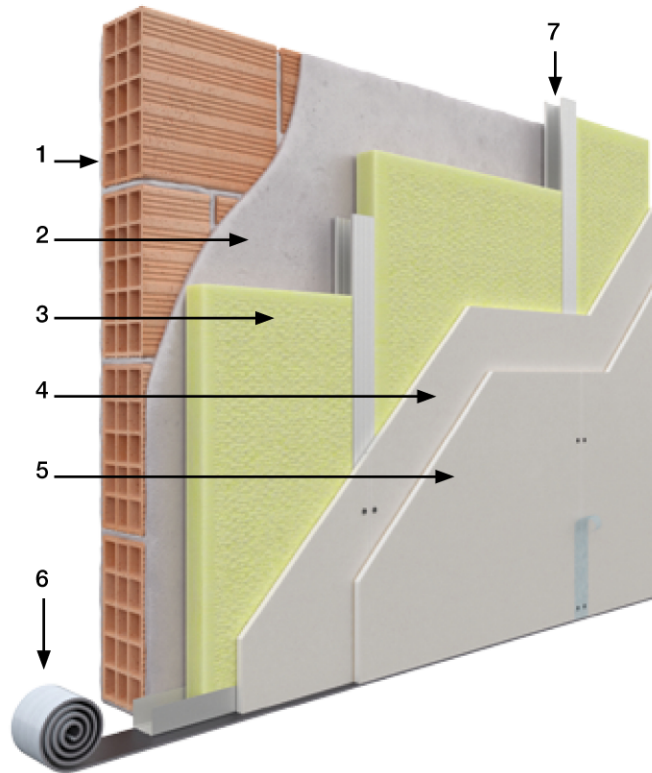


SISTEMI CERTIFICATI



## CONTROPARETI

Rw= 67 dB

Certificato 339208 I.G.




## LEGENDA

1. Parete leggera in laterizi
2. Intonaco cementizio
3. Lana di vetro SP 45 mm  
D. 12 Kg/m<sup>3</sup>
4. Lastra di gesso rivestito  
BA 12,5 mm
-  5. AKUSTIK® GIPS ART. 2
-  6. AKUSTIK® BAND
7. Guide e montanti 50 mm

Rw= 68 dB

Certificato 331864 I.G.

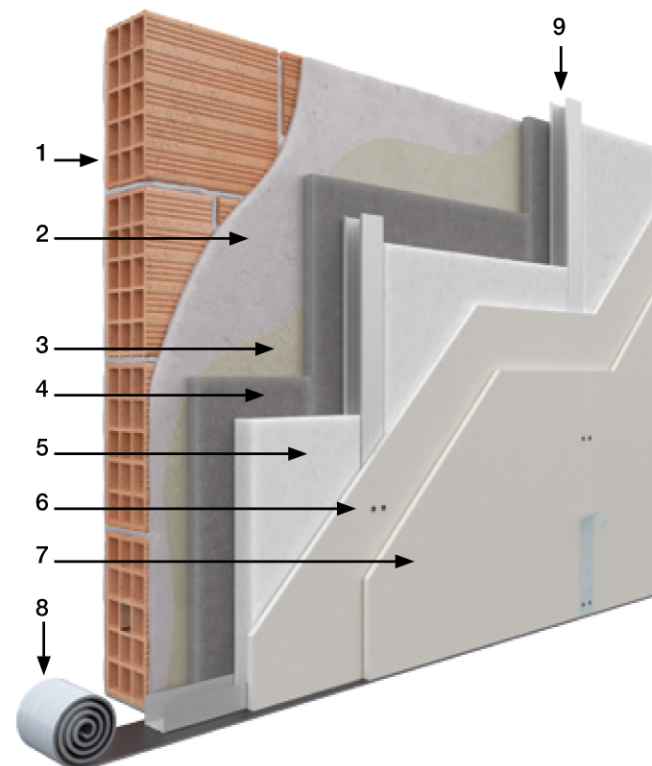

## LEGENDA

1. Parete leggera in laterizi
2. Intonaco cementizio
-  3. NDA KOLL
-  4. AKUSTIK® METAL SILK ART. 1  
Sp 20 mm PB 0,35 mm
-  5. AKUSTIK® SOFT SP 20mm  
D. 30 Kg/m<sup>3</sup>
6. Lastra di gesso rivestito  
BA 12,5 mm
-  7. AKUSTIK® GIPS ART. 2
-  8. AKUSTIK® BAND
9. Guide e montanti 50 mm