


COUNTERWALLS

SOUND AND THERMAL INSULATION ON EXISTING WALLS WITH HIGH PERFORMANCE SYSTEMS

Rw= 59 dB


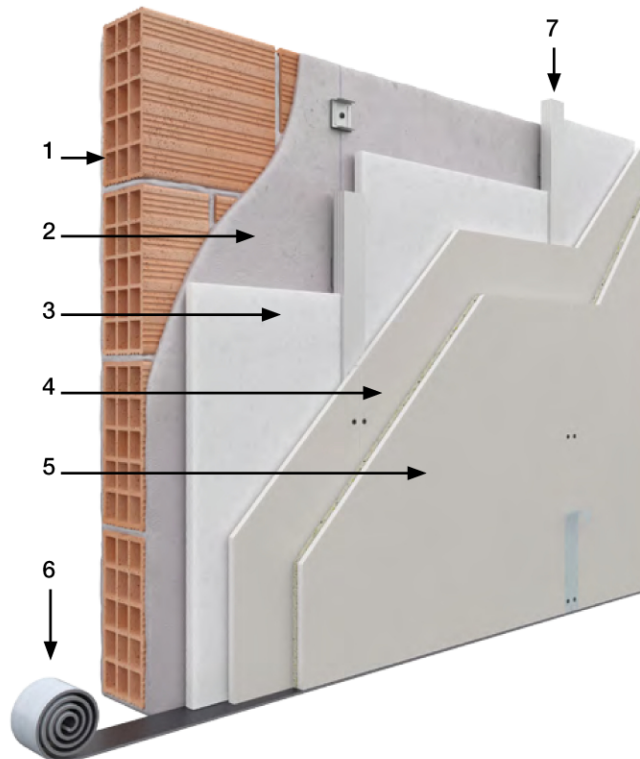


LEGEND

1. Light weight masonry
2. Cement mortar
-  3. AKUSTIK® SOFT SP 20mm D. 30 Kg/m³
4. Plasterboard BA 12,5 mm
-  5. AKUSTIK® GIPS C1
-  6. AKUSTIK® BAND
7. Connecting clip and metal stud 50/27

Rw= 64 dB

Certificate n. 339207 I. G.

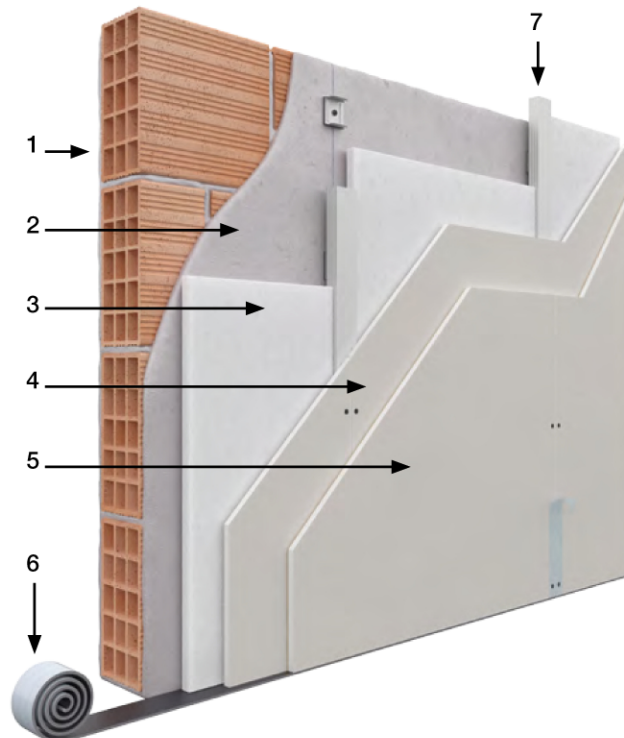

LEGEND

1. Light weight masonry
2. Cement mortar
-  3. AKUSTIK® SOFT SP 20mm D. 30 Kg/m³
4. Plasterboard BA 12,5 mm
-  5. AKUSTIK® GIPS ART. 2
-  6. AKUSTIK® BAND
7. Connecting clip and metal stud 50/27